

XLM HD30



The ultimate high-brightness projector

Barco's XLM HD30 projector is the brightest projector available on the market today. As the first DLP™ projector with a native wide-screen aspect ratio, native 2048 x 1080 resolution and light output of 30,000 center lumen, the XLM HD30 projector is ideally suited to ultra wide-screen and HD projections.

With its functional design, fully sealed DMD engine and adjustable convergence system, the XLM HD30 projector is purpose built to work around the clock, making it ideal for use in the demanding rental & staging and large events markets.

BARCO

Visibly yours

Ultra bright wide-screen projection

Barco's XLM HD30 projector provides a native resolution of 2048 x 1080 pixels, which make it ideally suited to wide-screen projections that must deliver crisp, clear video and data content in the most demanding environments.

Using a 6.3kW Xenon lamp which produces 30,000 Center Lumen, the XLM HD30 projector guarantees the perfect high-impact projection in even the most critical application.

The XLM HD30 obviously is also the best choice for extreme bright HDTV projections/applications.



XLM HD30

Purpose built for demanding rental & staging applications

Reliable and built to work around the clock, Barco's XLM HD30 projector is a sturdy single box/cabinet projector.

- **Fully sealed DMD engine**

Even at 30k lm, Barco's XLM HD30 features a fully sealed DMD engine that is protected against smoke and dust often found in entertainment and large event environments.

- **Multi image windowing**

The XLM HD30 is able to show all 4 signal inputs simultaneously on screen. Leading the way in wide-screen projection, the XLM HD30 can be used for multiple window wide-screen presentations without the need for an external image processor.



- **Minimum image latency**

Beneficial for live events the XLM HD30 uses latest technology to offer minimum image latency.

- **Easy to operate**

Purpose built for use in the rental & staging industry, the XLM features an intuitive on-screen menu which ensures that the projector is easy and simple to operate.

- **Motorized tilt adjustment**

Easy and fast motorized projection installation (eg. edge blending of 2 projectors) via motorized edge blending.

- **High quality edge blending**

Via special 16 bit color process (P7), high contrast ratio (min. 1600:1) and Scenergix standard.

- **Rugged Remote Control**

Each XLM HD30 is delivered inclusive of a Rugged Remote Control.



Rugged remote

- **User-configurable lay-out**

The XLM HD30 projector also allows users to configure custom on-screen window lay-outs. Each individual lay-out can be stored and recalled throughout the presentation as required.

- **Projector Toolset**

PC based application to control and remote diagnose XLMs and FLMs.

- **Flightcase**

A specially designed flightcase is available optionally.

- **Adjustable convergence system**

Its adjustable convergence system allows for manual adjustments in the field.

- **Liquid cooling**

An effective Liquid Cooling System enables the sealed engine to reliably handle the extremely high light output.

- **Integrated rigging points**

The projector's integrated rigging points allow easy double-stack installations, which can be truss mounted. When placed on the ground, the XLM HD30 projector can even be triple-stacked without requiring additional support structures.



Integrated rigging points

Flexibility through modularity

- **Modular inputs**

The XLM HD30 is equipped with four standard input slots which accommodate both analogue and digital inputs. As standard, each XLM HD30 projector (R9004460) comes equipped with RGB, DVI-D, SDI and HD-SDI input modules, which are all modular and can be exchanged with other input modules as required. The XLM HD30 is compatible with all sources ranging from RGB-analogue, RGB/YUV (15kHz), DVI-D, SDI, Composite Video/S-video and HD-SDI.



Modular inputs

- **Lamp power redundancy**

Three equivalent 2kW lamp power supplies offer you the necessary redundancy; an interesting feature in the Rental & Staging Market.


- **Lamp house module**

The XLM's lamp house module allows for quick, easy exchange of the projector's lamp.


- **Click & Play lens holder**

A wide range of lenses can be used with the XLM to cover even the most critical applications. The stable click & play lens holder of the XLM HD30 makes lens exchanges quick, simple and easy.


- **Modular design**

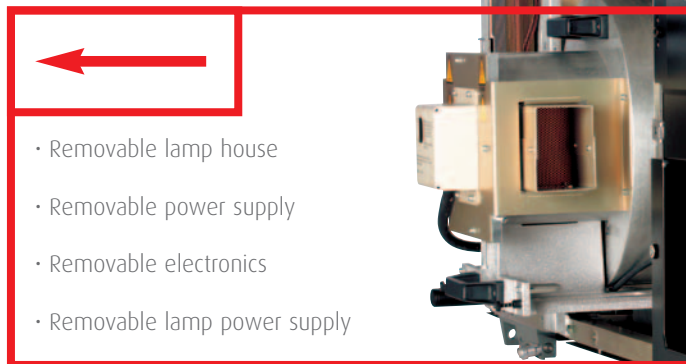

- Removable lamp house
- Removable power supply
- Removable electronics
- Removable lamp power supply

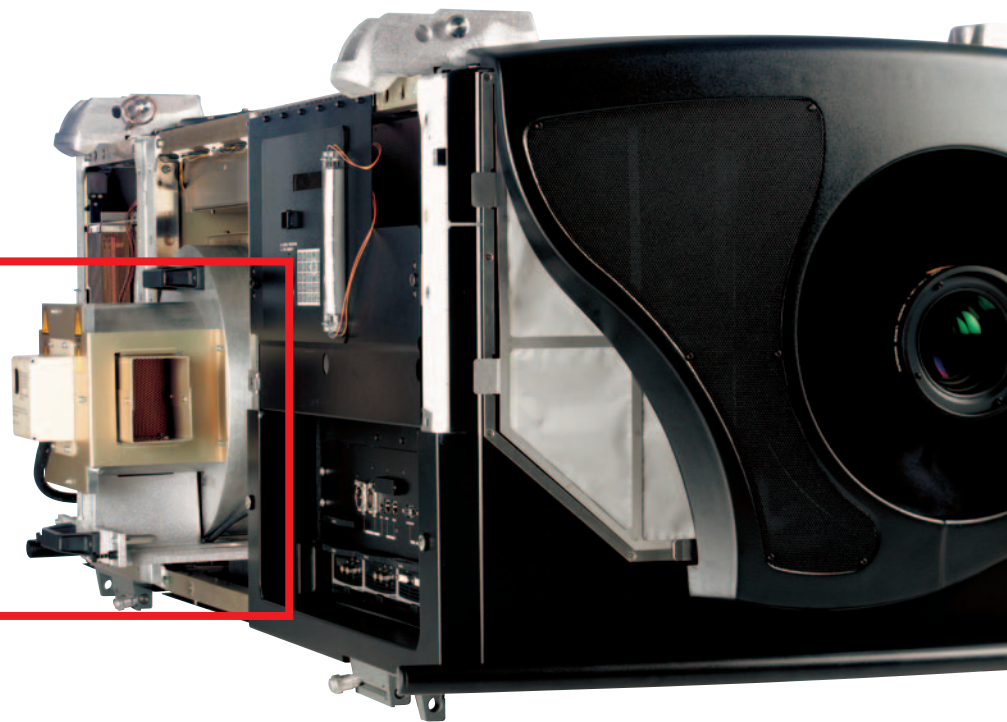

XLM HD30 specifications
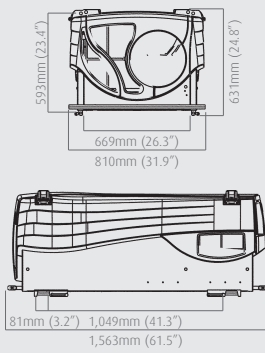
| | | |
|---|---|--|
| Light output ⁽¹⁾ | 30,000 center lumen | DIMENSIONS  |
| Resolution | 2,048 x 1,080 (native) | |
| Contrast ratio | 1,600:1 (full field) | |
| High contrast mode | available with special lenses | |
| Lamp | 6.3kW Xenon | |
| Lamp warranty | 750 Hrs | |
| Max. ambient temperature | 35°C (95°F) | |
| Power consumption | 8,400 W | |
| Mains voltage | 3 x 400 V + N or 3 x 220 V | |
| Weight projector | 180 kg (400 lbs) | |
| Dimensions (W x L x H) | 810 x 1,563 x 631 mm (31.9 x 61.5 x 24.8 inch) | |
| FEATURES | | |
| Sealed DLP core | standard | |
| Scenergix | standard horizontal & vertical electronic edge blending | |
| Network connectivity | standard (10/100 base-T; 2 ports, internal hub) | |
| Advanced picture in picture | up to 4 sources simultaneous (with alfa blending; z-order) | |
| INPUTS | | |
| Input source compatibility ⁽²⁾ | 1,600 x 1,200 (max. input) | |
| Modular inputs - standard | 1x DVI • 1x SDI • 1x HD-SDI (all + loop through) • 1x RGB analogue (up to UXGA) | |
| Modular inputs - optional | 1x composite video/S-video • 1x RGB/YUV (both + loop through) | |
| ORDER INFORMATION | | |
| Projector (incl. 4 inputs) | R9004460 | |
| Projector (incl. 1 DVI) | R9004461 | |
| Spare lamp | R9852411 | |
| LENSES | | |
| Fixed focal lenses | XLD 1.0 R9852950 | |
| Zoom lenses | XLD 1.45 - 1.8 R9852090 | |
| | XLD 1.8 - 2.4 R9852092 | |
| | XLD 2.2 - 3.0 R9852094 | |
| | XLD 2.8 - 5.5 R9852100 | |
| | XLD 5.5 - 8.5 R9852920 | |

⁽¹⁾ measured with XLD 1.45 - 1.8 on axis

⁽²⁾ all current video sources in composite, S-VHS, RGB or component or Serial digital format all current proposed HDTV, extended and improved television standards (1080i, 720p, ...) computer and workstations with a resolution up to 1,600 x 1,200 most Macintosh computers direct digital interfacing with current and future digital standards



Ref.no. R599108 - May 2006

DLP™ technology by Texas Instruments offers crystal clear images with superior quality. DLP is a trademark of Texas Instruments.

The information and data given are typical for the equipment described. However any individual item is subject to change without any notice. The latest version of this product sheet can be found on www.barco.com.

Barco Media & Entertainment
 Noordlaan 5, 8520 Kuurne - Belgium
 Tel. +32 56 36 89 70 - Fax + 32 56 36 83 86
 email: sales.events@barco.com

BARCO

Visibly yours